526529

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 11 March 2004 (11.03.2004)

PCT

(10) International Publication Number WO 2004/021669 A1

(51) International Patent Classification⁷: 12/56

H04L 29/06,

(21) International Application Number:

PCT/SG2002/000203

(22) International Filing Date:

2 September 2002 (02.09.2002)

(25) Filing Language:

English

(26) Publication Language:

English

- (71) Applicant (for all designated States except US): IN-FINEON TECHNOLOGIES AG [DE/DE]; St.-Martin-Strasse 53, 81669 Munich (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MISHRA, Shridhar, Mubaraq [IN/US]; 1325A Spruce Street, Berkeley, CA-94709 (US). ARDHANARI, Guruprasad [IN/SG]; Blk 109 Hougang Ave 1 #09-1012, Singapore 530109 (SG).
- (74) Agent: WATKIN, Timothy, Lawrence, Harvey; Lloyd Wise, Tanjong Pagar, P.O. Box 636, Singapore 910816 (SG).

- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A DATA SWITCH AND A METHOD FOR BROADCAST PACKET QUEUE ESTIMATION

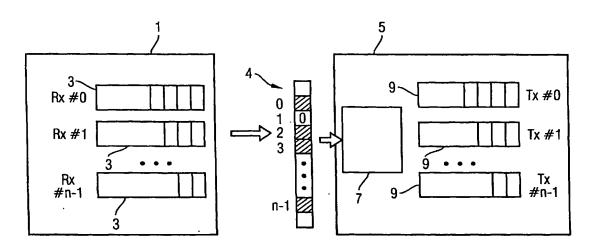

(57) Abstract: A data switch includes ingress ports associated with ingress queues (3) and egress ports associated with egress queues (9). The length of the ingress queues (3) is measured, and the level of broadcast packets arriving at the ingress ports is thereby estimated. Based on this estimate it is determined whether or not the level of broadcast packets is excessive, and in this case broadcast storm control is carried out.



